

CEILING-MOUNTED SWEEP FANS (Modell 90 og 140 lagerføres i hvit)

NORDIK® INTERNATIONAL PLUS



- Simple, modern design suitable for any type of room. The model 160/60" is especially suitable for heat recirculation in industrial and commercial applications.
- Available in 4 blade sizes (90, 120, 140 and 160) in white, wood grain finish and silver.
- Induction motor with external rotor for greater power at slow speed.
- Also suitable for night time operation due to strong coated steel laminate blades with a shape designed to guarantee quiet performance.
- Complies with the CEI 61-28 standards.
- Metal parts painted with scratchproof polyester powder.
- Supplied with 37.5 cm ceiling rods.

Accessories

(description and data on pages 153-154)


- Infrared remote-control unit (TeleNordik® 5T).
- 5-position speed controller (SCNR5, SCNRL5).
- Wide range of ceilings rods.
- Plus Light Kit (code 22415) for white models, and (code 22416) for wood grain models.

Wiring diagrams shown on page XXVII.









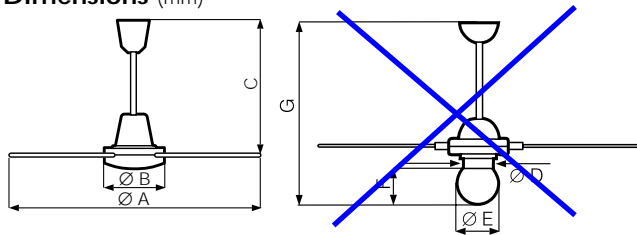







Design: F. Trabucco and M. Vecchi

Dimensions (mm)



Nordik International Plus	Ø A	Ø B	C	Ø D	Ø E	F	G
90/36"	914	209	495	130	200	180	776
120/48"	1218	209	495	130	200	180	776
140/56"	1422	209	495	130	200	180	776
160/60"	1524	209	495	130	200	180	776

Product	Colour	Code	V ~ 50 Hz	W motor	A	Rpm	m³/h	Approvals	kg	Insulation
 Nordik International Plus 90/36"		61701	220-240	68	0.32	228	8.550		6.2	 cl.I
 Nordik International Plus 120/48"		61711	220-240	70	0.33	234	9.900		6.6	 cl.I
		62010								
 Nordik International Plus 140/56"		61721	220-240	72	0.33	231	13.500		6.9	 cl.I
		62011								
		61723								
 Nordik International Plus 160/60"		61731	220-240	73	0.33	201	14.000		7.4	 cl.I

Flow rates measured according to CEI 107/35.76 standards.

Conforms with ISO 3744 for noise and pressure levels.