

Moving Coil Instruments

240 degrees pointer deflection


Customer item no.:

Customer ID name:

Specification:

Type: KrD96S, 0/4-20mA, RTP IP56
 Range: 0/4-20mA DC
 electric suppressed zero point
 Ri: ca 225Ω
 Class: 1,5
 Front frame: 96 x 96 mm
 Length of scale: 142 med mer
 Weight: 0,7 kg

Manufactured by Müller & Weigert, Nürnberg

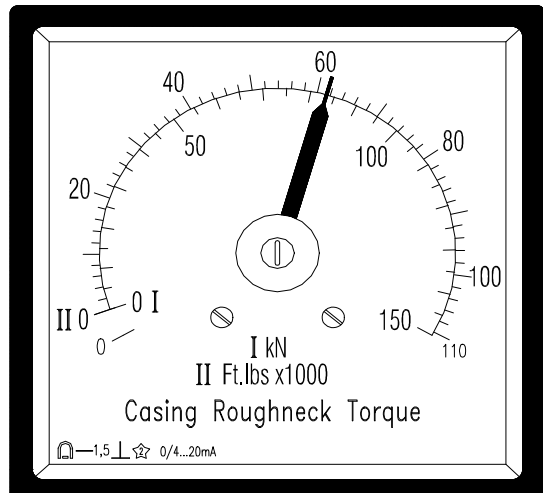

General:

Shipboard Instruments as per Lloyd's Register of Shipping (Cert.no. AP-98)
 Designed as per VDE 3540,p.2 climatic category 3.
 Splash proof design IP56

Shock proof up to 5g
 Thrust proof up to 15g

Test voltage: 2 kV
 Temperature range for operation: -25...+55 C
 Temperature range for storage: -40...+70 C

Front window in plexi glass

For impacttest:

Option Q96 Additional plexifront cover for impacttest
 cutout: 92,8 +0.8 x 92,8 +0.8

Dimension drawings:

